

HVAC RNTL

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	18,000 BTUH
VOLTAGE	115V, 60Hz, 1PH
AMPS	11.3
TOTAL WATTS	1300
IN RUSH AMPS	69
PLUG TYPE	5-15P, LCDI
EER	13.8
COMPRESSOR	ROTARY
COMPRESSOR HP	1-1/2
COMPRESSOR LRA	63
EVAP CFM - HIGH	600
EVAP MOTOR HP	1/8
CONDENSER WATER FLOW	
AT 60°F WATER IN	1.1 GPM
AT 85°F WATER IN	4.5 GPM
WATER LINE CONNECTIONS	
WATER IN	3/8 MF
WATER OUT	3/8 MF
DRAIN	3/8 MF
CONDENSATE REMOVAL	PUMP AUTOMATIC 20' VERTICAL LIFT
REFRIGERANT CHARGE	18 oz R-410A
HEIGHT	39-3/4 in
WIDTH	24-1/4 in
DEPTH	13 in
NET WEIGHT	155 lb

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**
NOT APPROVED FOR OUTDOOR USE

MODEL: OWC1811
1.5 TON DELUXE PORTABLE
WATER-COOLED AIR CONDITIONER





PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER




ACCESSORIES

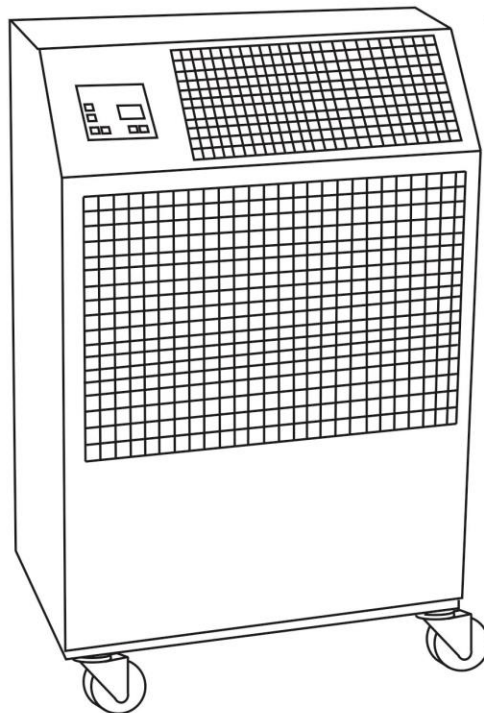


NK-2 (2 x 6")
NOZZLE KIT
for Directional
Cooling/Heating



DDA-10
DISCHARGE
DUCT ADAPTER
for Extended
Single Duct Length



2DEP-12
EVAPORATOR RETURN
AIR PLENUM

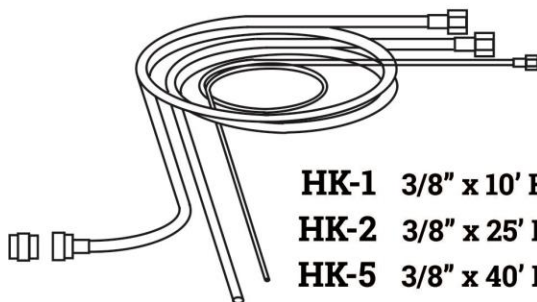

HK-1 3/8" x 10' HOSE KIT
HK-2 3/8" x 25' HOSE KIT
HK-5 3/8" x 40' HOSE KIT